

Air-Guard Bronze Air Control Station 20 SCFM

72/74 SERIES

- Provides clean, dry, oil-free compressed air
- Rugged bronze filter for marine applications
- Dual cartridges ensure long service life
- Air-conserving automatic drain sump



SPECIFICATIONS



Maximum pressure	150 psi
Rated flow	20 scfm @ 100 psig
Connections	1/2" NPT
Filter type	Dual cartridge coalescing elements
Housing	Bronze
Efficiency	99.98% of 0.1 micron or greater
Weight	17 lb./7.7 kg

APPLICATIONS

- Tank level and draft indicating systems for the marine and offshore industries
- Marine
 - Tank level, draft monitoring and vessel management
 - Ballast water
 - Fuel oil
 - Fresh water
 - Lube oil
 - Brine
 - Preload
 - Holding

Marine Applications

Pneumatic components and instrumentation will be more dependable and require less maintenance when supplied clean air through the KING-GAGE Air Control Station. Installed upstream of tank gauges or Purge Control level transmitters, they provide complete filtration and point-of-use supply pressure regulation. Typical installations shown.

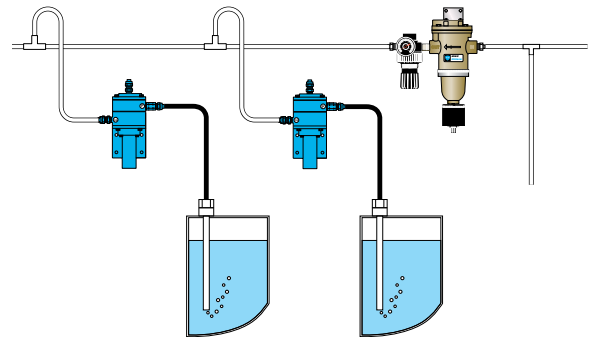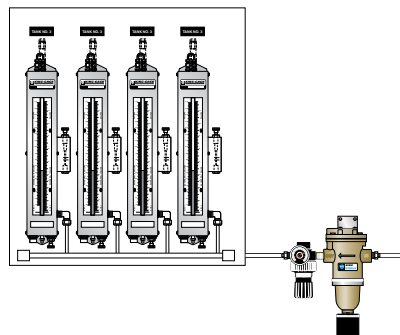



ORDERING INFORMATION		
SERIES	72 Air-Guard Bronze Air Control Station 20 SCFM with manual drain	74 Air-Guard Bronze Air Control Station 20 SCFM with auto drain
FIXED CONFIGURATION	024-6-25	

NOTES: Includes Type 750/800 cartridge set.
For U.S. Navy Service specifications, please contact factory.

EXAMPLE

Series 74 Series with auto drain
Fixed configuration

74 - 024-6-25

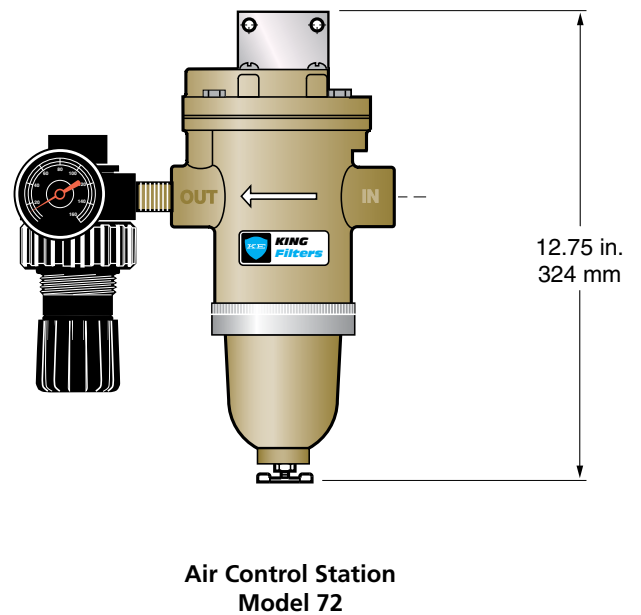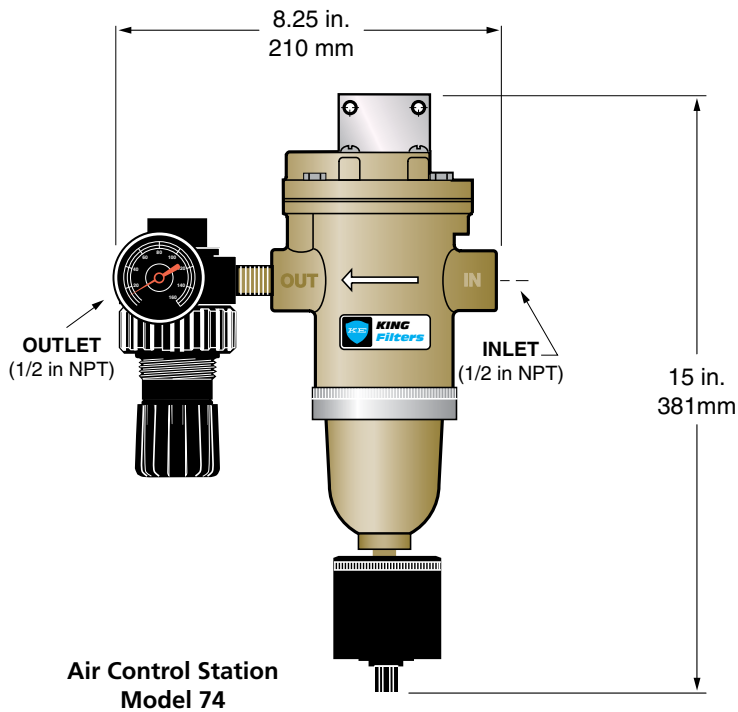

Replacement Cartridge
9326-241 - Type 750/800 Type 800 (0.1 micron)